


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/26/11	D.FRISIELLO

## PULLING EYE KITS FOR A PRE-TERMINATED FIBER OPTIC CABLE



### PEK SERIES

Opticon's PEK SERIES pulling eye kits protect pre-terminated fiber optic cables during installation conduits, ducts or risers. Available to be used with 2 to 24 fiber cables. PEK SERIES saves time and costs by allowing the installation of pre-connectorized multi fiber cables. The pulling eye is strain relieved directly onto the cable's outer jacket, while housing the terminations in a protective sheath. As a result, no stress or strain is transferred to the terminations during the cable installation process. Available factory installed or in kit form for installation in the field.

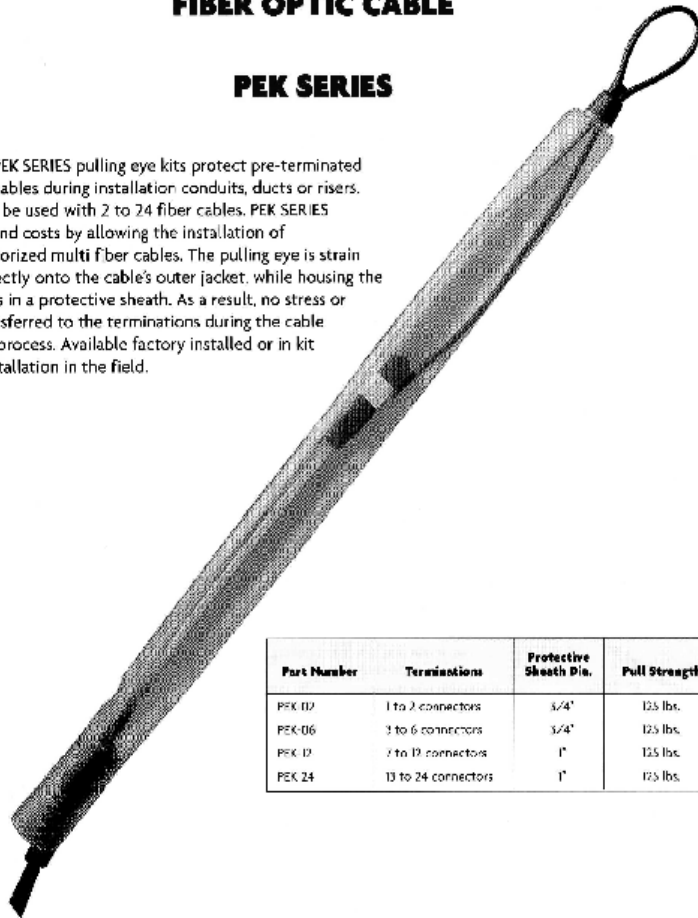

Part Number	Terminations	Protective Sheath Dia.	Pull Strength
PEK 02	1 to 2 connectors	3/4"	125 lbs.
PEK 06	3 to 6 connectors	3/4"	125 lbs.
PEK 12	7 to 12 connectors	1"	125 lbs.
PEK 24	13 to 24 connectors	1"	125 lbs.

CATALOG P/N	MFGR P/N
FOC-EYE	PEK-02
FOC-EYE-06	PEK-06
FOC-EYE-12	PEK-12
FOC-EYE-24	PEK-24

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	7/19/11				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D.FRISIELLO	7/19/11	CATEGORY FIBER OPTICS			
	APPROVED BY D.GALLAGHER	7/19/11	PRODUCT DESCRIPTION PULLING EYE FOR FIBER			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. FOC-EYE	REV. <b>A</b>
			SCALE: NONE	CAD FILE: FOC-EYE.SLDRW	SHEET 1 OF 1	